


SDS Assistant Stool Assembly Instructions



- Four Steps to assemble the Stool:**
1. Insert the lower end of Gas Piston into the Base (Spider) and press it firmly into place.
 2. Insert the 5 Barrel Casters into the holes at the bottom of the Spider.
 3. Insert the J-Bar onto the Ring attached to the Piston.
 4. Position the Seat Plate onto the top of the Piston. Sit on the Stool to lock in into place.

Parts List - Assistant's Stool

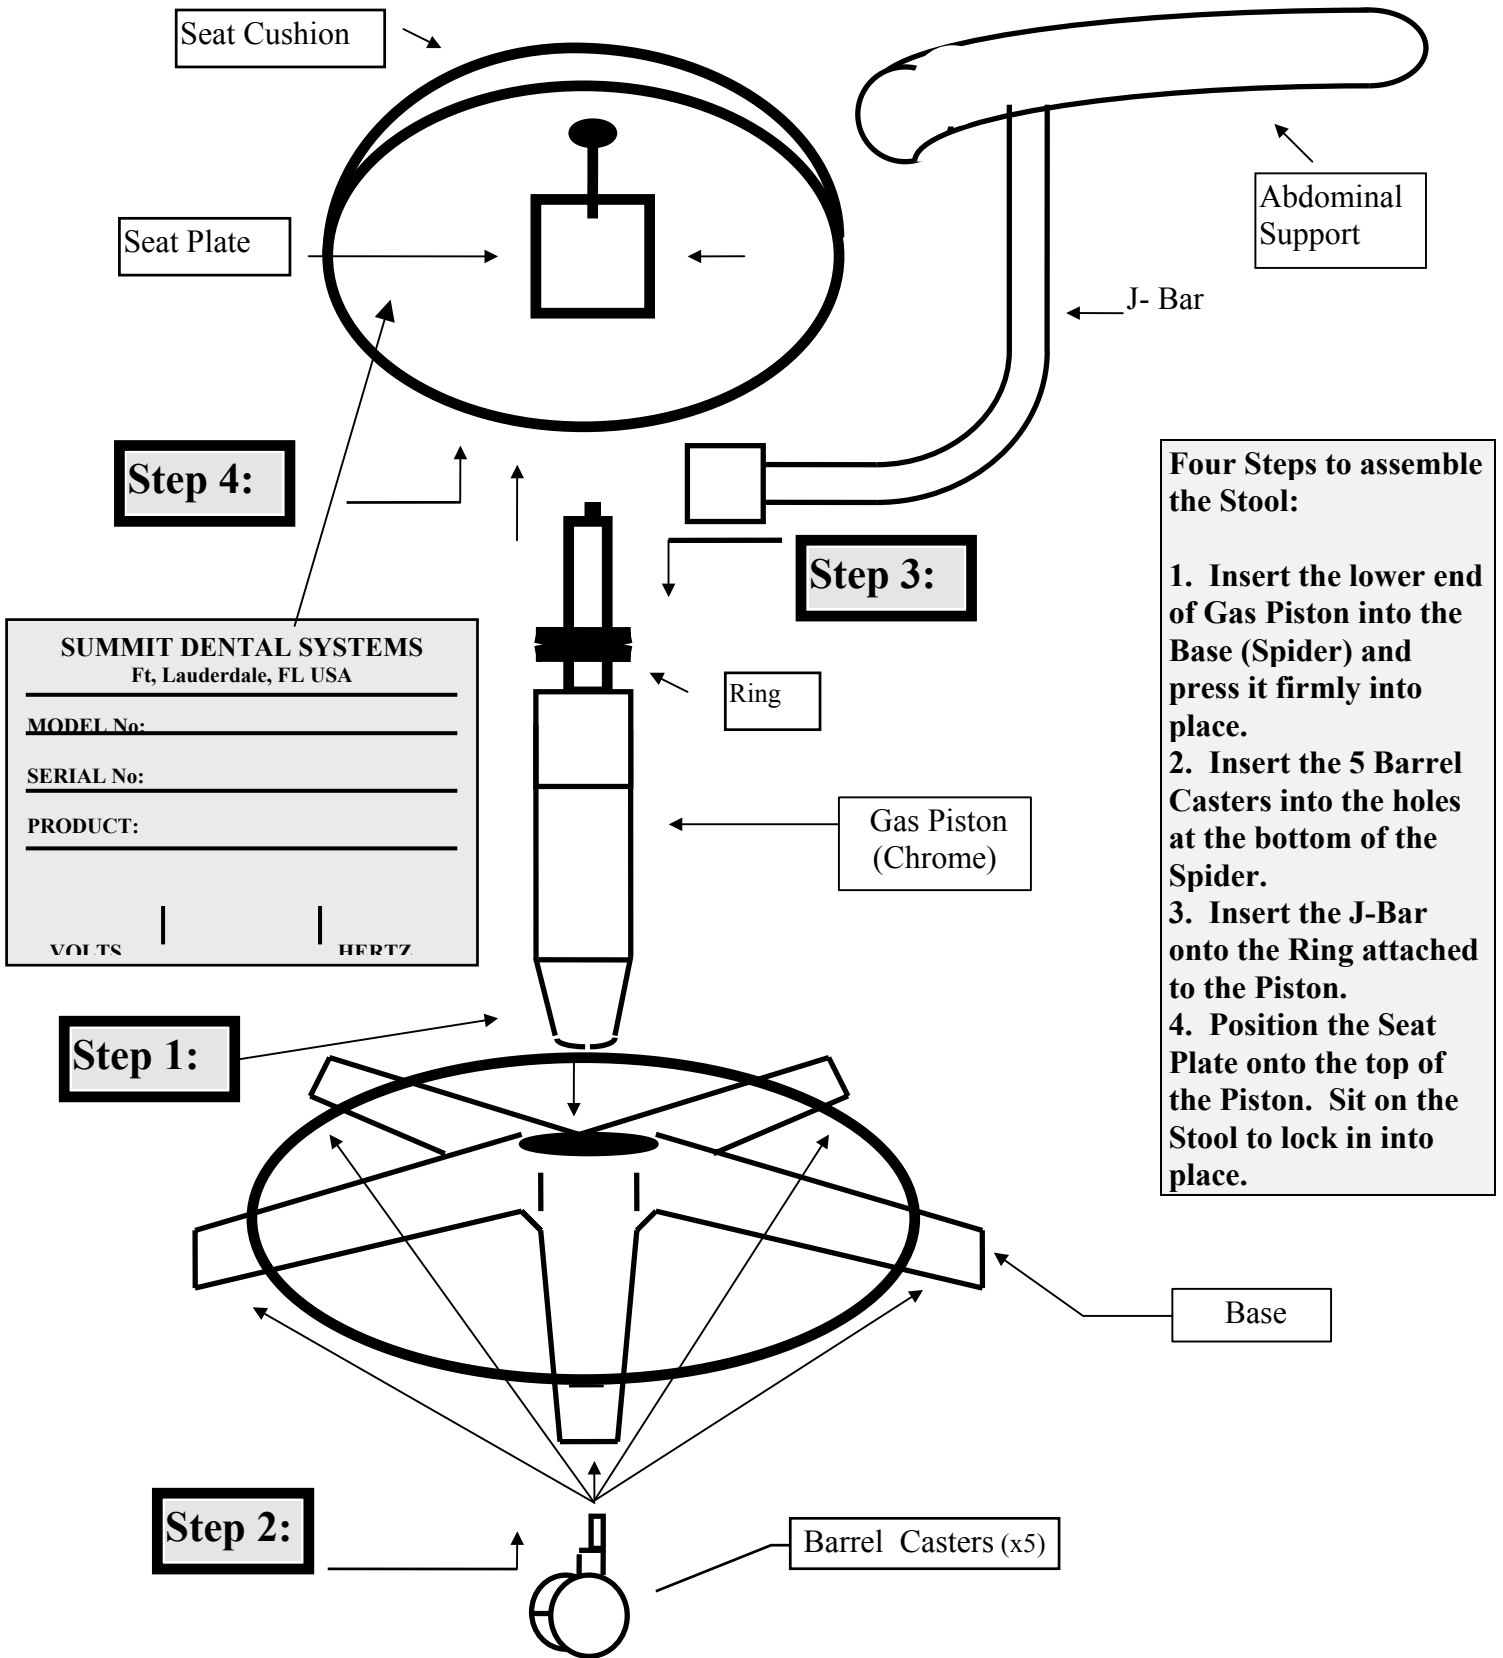